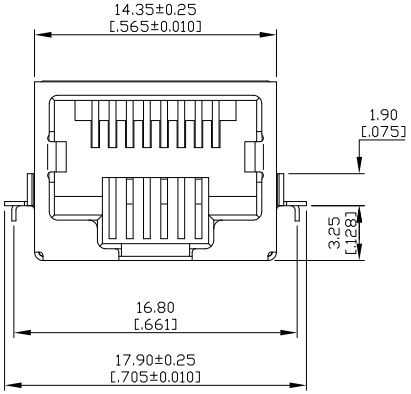

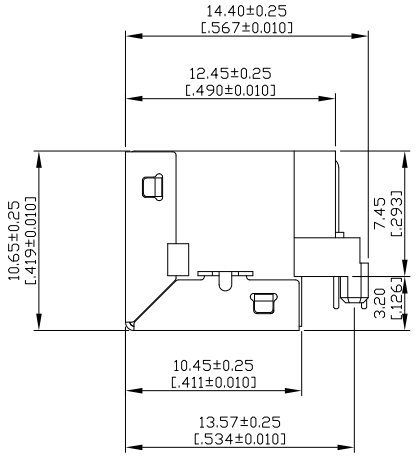



Electrical Characteristics :
- Insulation Resistance : 100M£[Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.0A

Material:
- Housing : Thermoplastic UL94V-0
- Contact : Selective Gold Plating
- Terminal: 0.3mm Thickness Phosphor Bronze, Tin Plated on the Solder Area.
- Shield : Brass, Nickel Plating.

CUL File No : E215573

PART NO : 3088B-B∗10

- Positions
- Contacts
- Housing Color B : Black
- Ports
- Gold Plated
  - 0 : Gold Flash
  - 1 : 6u"
  - 2 : 15u"
  - 3 : 30u"
  - 4 : 50u"

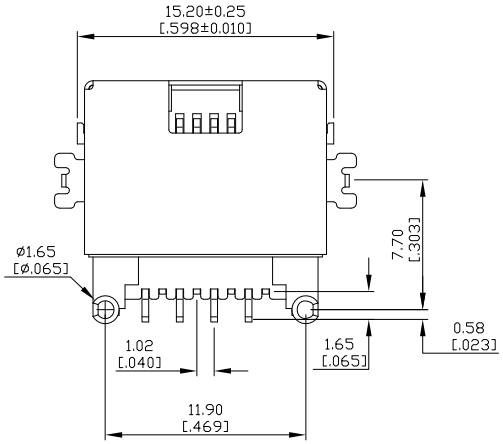

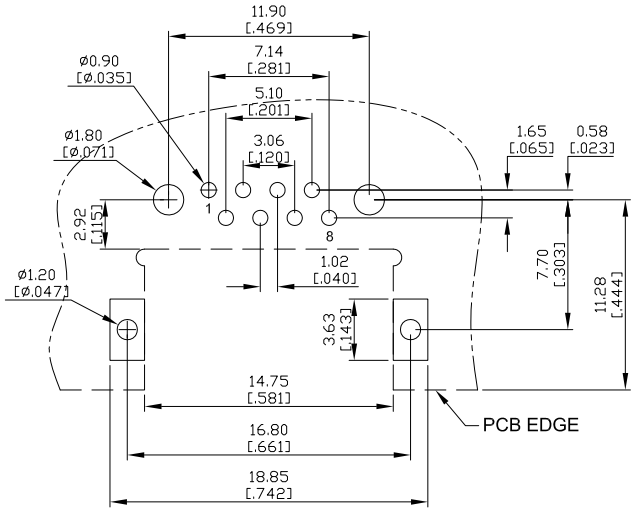

RECOMMENDED PCB LAYOUT
TOP VIEW

CHAMPWAY 冠泰電子有限公司
CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.
Ⓐ				
Ⓑ				
Ⓒ				
Ⓓ				
Ⓔ				

FILE NO : 30 (SERIES)

TOLERANCE (公差) :
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

TITLE 圖 名	WITH SHIELDED RJ45 SIDE ENTRY PCB JACK			UNIT 單位	mm inch
PART NO. 料 號	3088B-B∗10			SCALE 比 例	1 : 1
REV. 版本	A.0	DATE 日 期	2009-03-11		
CHECKED BY 審 核	Michael	DRAWN BY 製 圖	Michael		