
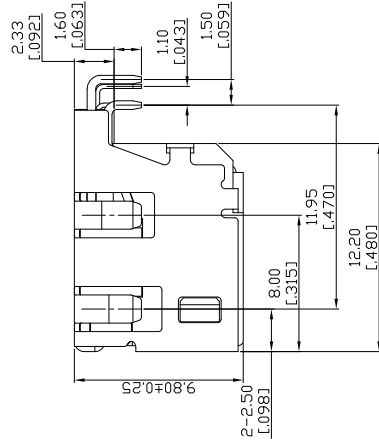


Insulation Resistance : 500M Ω /Min.
Contact Resistance : 50m Ω Max.
Withstand Voltage : 100 VAC 1 min
Current Rating : 1.5A



Housing : Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal : 0.25mm Thickness Phosphor
Plated With Gold And Tin In
Shell : SUS,Nickel Plated On The

Positions
Contacts
Housing Color
B : Black

Led Options
Ports
Gold Plated
0 : Gold Flash
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"



LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

	<div><div></div><div><div>CHAMPWAY</div><div>冠泰電子有限公司</div><div>CHAMPWAY ELECTRONICS CO., LTD.</div></div></div>									
ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 87 (SERIES)					
①					TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm					
②										
③										
④										
⑤										
					TITLE 圖 名		RJ45, 8P8C, Shielded, With LED, Offset Type, Thru Hole, RJ11 Mateproof Function		UNIT 單位	mm inch
					PART NO. 料 號		8788K3-B * 1 *		SCALE 比 例	1 : 1
					REV. 版 本		A.0 日 期			
					CHECKED BY 審 核		Aaron		DRAWN BY 製 圖	
									Eric	