


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.
Shielded: Brass ,Nickel Plating
CUL File No : E215573

PART NO : 8 3 8 8 C S - B * 1 *

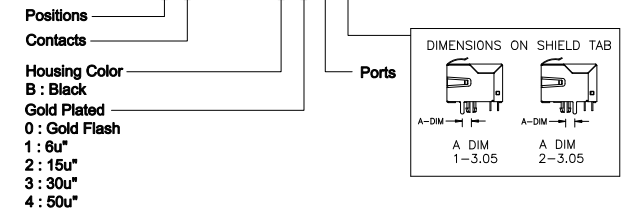

CHAMPWAY 冠泰電子有限公司
 CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 83 (SERIES)	TITLE	SHIELDED RJ45 SIDE ENTRY PCB JACK		UNIT	mm
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075mm 0.00 mm ± 0.15mm 0.0 mm ± 0.25mm	圖名			單位	inch
Ⓑ						料號	8388CS-B * 1 *		SCALE	1 : 1
Ⓒ						版本	A.1	DATE	2007-07-17	
Ⓓ						日期				
Ⓔ						審核	Michael	DRAWN BY		製圖