


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573

PART NO : 8508 - B * 1 *

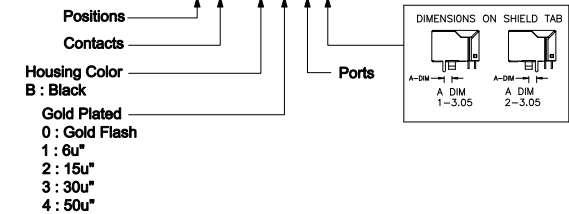

CHAMPWAY 冠泰電子有限公司
 CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)	TITLE	SHIELDED RJ45 SIDE ENTRY PCB JACK		UNIT	mm	
①	A.1	尺寸更正為12.2	2007-05-15	Aaron	TOLERANCE (公差) : 0.00 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	圖名			單位	inch	
②	A.2	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick		PART NO.	8508-B * 1 *		SCALE	1:1	
③						REV.	A.2	DATE	2007-01-16		
④						版本		日期			
⑤						CHECKED BY	Michael		DRAWN BY	Valiant	
⑥						審核			製圖		