
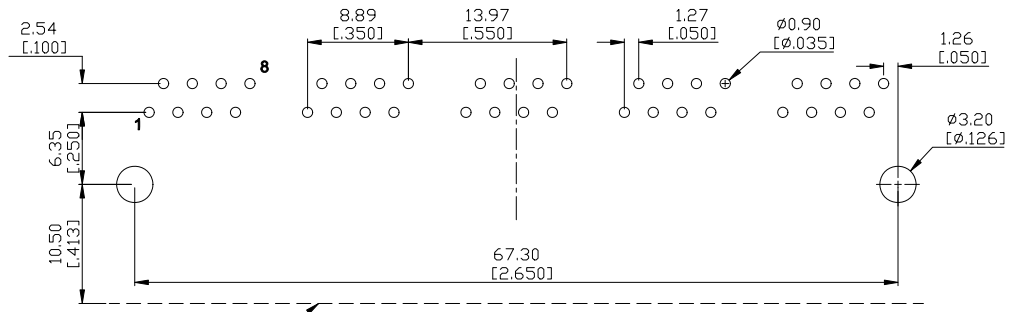
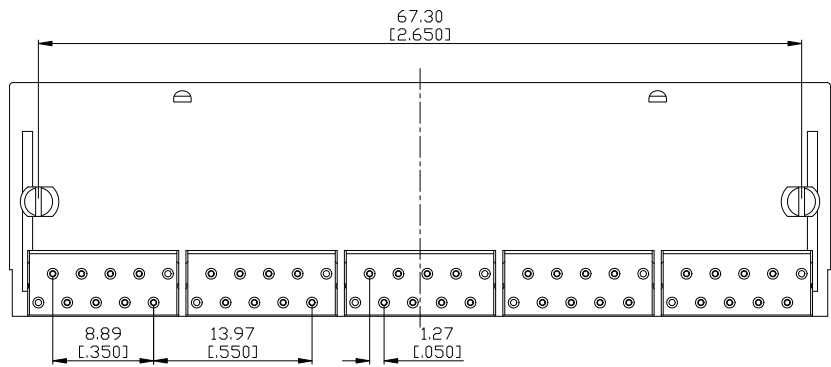


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

PART NO : 8 2 0 8 - B * 5

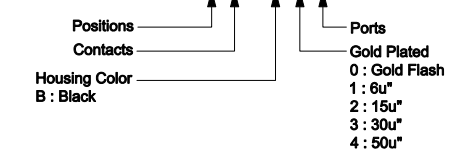

**SUGGESTED PCB LAYOUT
TOP VIEW**



ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
(B)				
(C)				
(D)				
(E)				

FILE NO : 82 (SERIES)

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

TITLE 圖名	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK		UNIT 單位	mm inch
PART NO. 料號	8208-B*5		SCALE 比例	1:1
REV. 版本	A.1	DATE 日期	2007-06-20	
CHECKED BY 審核	Michael		DRAWN BY 製圖	Valiant