

**SUGGESTED PCB LAYOUT
TOP VIEW**

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 30mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0

Contact : Full Gold Plating


Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

Shield : Brass, Nickel Plating.

CUL File No : E215573

PART NO : 5 4 8 8 - B * 1 1

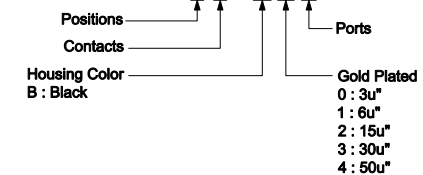

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 54 (SERIES)	TITLE	SHIELDED RJ45 SIDE ENTRY PCB JACK		UNIT	mm	
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	圖名			單位	inch	
Ⓑ						PART NO.	5488-B * 11		SCALE	1:1	
Ⓒ						料號			比例		
Ⓓ						REV.	A.1	DATE	2007-02-06		
Ⓔ						版本					
						CHECKED BY	Michael		DRAWN BY	Valiant	
						審核			製圖		