


**SUGGESTED PCB LAYOUT
TOP VIEW**

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shielded : Brass, Nickel Plating
 CUL File No : E215573

PART NO : 8 1 0 8 - B * 1 *

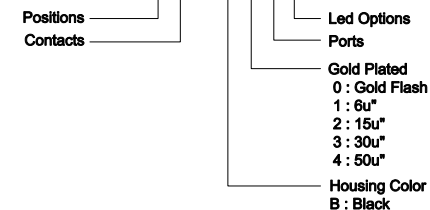

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D



ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)				
(B)				
(C)				
(D)				
(E)				

FILE NO : 81 (SERIES)
TOLERANCE (公差) :
 0.000 mm ± 0.075mm
 0.00 mm ± 0.15mm
 0.0 mm ± 0.25mm

TITLE 圖名	SHIELDED RJ45 WITH LED PCB JACK		UNIT 單位	mm inch
PART NO. 料號	8108-B*1*		SCALE 比例	1:1
REV. 版本	A.0	DATE 日期	2007-11-30	
CHECKED BY 審核	Nick		DRAWN BY 製圖	Aaron