

NOTE

1. RATING : DC 12V 50mA
2. CONTACT RESISTANCE : 100mΩMAX
3. GENERAL TOLERANCE : +/- 0.3 mm
4. MANUFACTURING SPECIFICATION
WOULD BE ACCORDANCE WITH WT0158
5. PART NO.(P/N):

TS801AH - 043 * * - 043 * *

DUAL STEM
RIGHT ANGLE

DIMENSION "L1"
SEE TABLE 1




STEM COLOR
□=BLACK
R=RED

OPERATING FORCE
A=100gf
B=160gf
C=260gf

OPERATING FORCE
A=100gf
B=160gf
C=260gf


STEM COLOR
□=BLACK
R=RED

DIMENSION "L2"
SEE TABLE 1

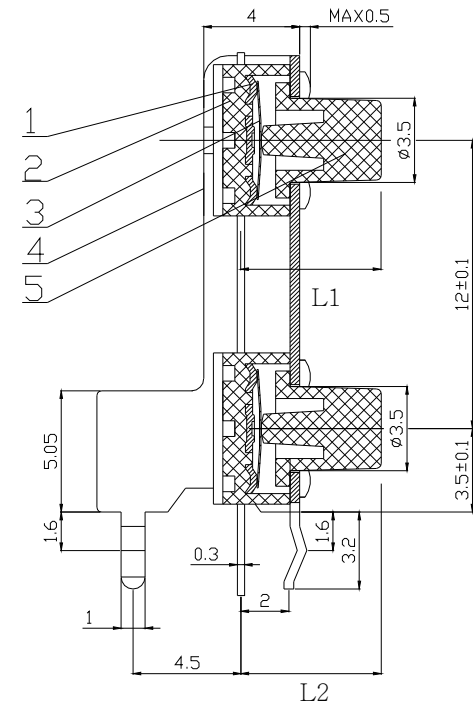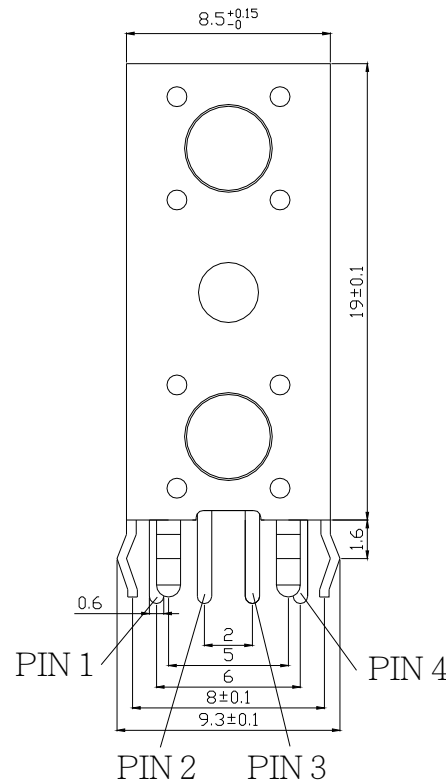

CIRCUIT DIAGRAM

TS801AH-083*-083*	8.35 mm
TS801AH-078*-078*	7.85 mm
TS801AH-073*-073*	7.35 mm
TS801AH-068*-068*	6.85 mm
TS801AH-063*-063*	6.35 mm
TS801AH-058*-058*	5.85 mm
TS801AH-053*-053*	5.35 mm
TS801AH-048*-048*	4.85 mm
TS801AH-043*-043*	4.35 mm
TS801AH-038*-038*	3.85 mm
TS801AH-033*-033*	3.35 mm
TS801AH-031*-031*	3.15 mm
MODEL NO.	"L1 = L2"

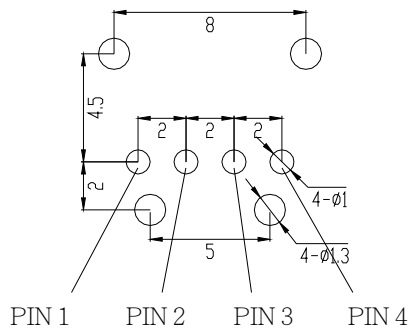

P.C.B LAND DIMENSION

NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
1	TERMINAL	Brass	China	1	Silver plating
2	BASE	PA66	China	1	Black
3	CONTACT	Phosphor bronze	Korea	1	Contact side silver plating
4	COVER	SPCC-SD	China	1	CuSn plating
5	STEM	PA66	China	2	

Designed by	L.Y.D			CHAMPWAY 冠泰電子有限公司 CHAMPWAY ELECTRONICS CO., LTD.				
Checked by								
Approved by		Unit	mm	Scale	1/1	Date	2011.10.14	
Item	Tact Switch		Tool	A-Cad	Sheet	1/1	Rev.	0
Model	Dual Stem RA DIP		Drawing name	TS801AH- * * * - * * *				